

HI-SPEED USB 2.0 PCI CARD QUICK INSTALL GUIDE

MODEL 169011




MANHATTAN[™]

MAN-169011-QIG-0707-02

Thank you for purchasing the MANHATTAN® Hi-Speed USB 2.0 PCI Card, Model 169011.

The easy-to-follow instructions in this guide help make installation of the card quick and simple, so you'll also soon be enjoying the benefits of these features:

- Adds 3 external and 1 internal Hi-Speed USB 2.0 ports
- Supports data transfer rates of up to 480 Mbps
- Compatible with all USB devices and hot-swappable — add and remove USB devices at any time
- Works with various USB devices: hubs, removable drives, digital cameras, scanners, CD-RWs, DVD-ROMs, PC video cameras and printers
- No driver software needed for Windows 2000 (SP4), XP, Server 2003 or Vista
- Supports high-speed (480 Mbps), full-speed (12 Mbps) and low-speed (1.5 Mbps) data transfer modes for simultaneous operation of multiple USB 2.0/1.1 devices
- Lifetime Warranty

System Requirements

- Windows 2000/XP/Server 2003/Vista
- Available PCI slot

Package Contents

- Hi-Speed USB 2.0 PCI Card
- Quick install guide

HARDWARE INSTALLATION


1. Turn off your computer.
2. Unplug the power cord and remove your computer's cover.
3. Remove the slot bracket from an available PCI slot.
4. To install the card, carefully align the card's bus connector with the selected PCI slot on the motherboard. Push the board down firmly.
5. Replace the slot bracket's holding screw to secure the card.
6. Replace the computer cover and reconnect the power cord.

DRIVER INSTALLATION

Windows 2000/XP/Server 2003/Vista automatically detects and installs the correct driver for the card. Ensure that you have the latest Service Pack installed: SP1 or later for Windows XP; SP4 or later for Windows 2000.

Verify Windows Driver Installation

1. Right-click “My Computer”; click “Manage”; click “Device Manager.”
2. Double-click “Universal Serial Bus Controllers” to confirm installation with the following display.
 - USB Root Hub (USB 2.0 Root Hub in Windows 2000)
 - USB Root Hub
 - USB Root Hub
 - VIA Rev 5 or later USB Universal Host Controller (VIA USB Universal Host Controller in Windows 2000)
 - VIA Rev 5 or later USB Universal Host Controller (VIA USB Universal Host Controller in Windows 2000)
 - VIA USB Enhanced Host Controller

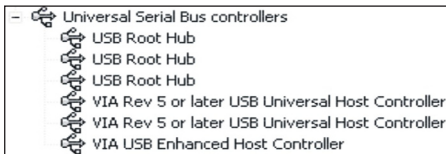

SPECIFICATIONS

Standards and certifications

- USB 2.0/1.1/1.0, FCC, RoHS, CE, WEEE

Port specifications

- 3 external Hi-Speed USB 2.0 ports, A-type
- 1 internal Hi-Speed USB 2.0 port, A-type

Bus specifications

- PCI 32-bit interface
- VIA 6212 chipset



MANHATTAN™

BRINGING COMPUTERS TO LIFE

www.manhattan-products.com

Are you completely satisfied with this product?
Please contact your MANHATTAN® dealer
with comments or questions.

Copyright © MANHATTAN

All products mentioned are trademarks or registered trademarks of their respective owners.